

# Cork Vista

**TORLYS**  
smart floors



VINTAGE NATURAL

 Seamless Installation

 Easily Repairable

 Gap Resistant

 Antimicrobial

 Dent Resistant

 Wear Resistant

 Warm&Quiet

 Plastic Free

# Cork Vista

**3/8" x 7-1/2" x 36"**

**9.5mm x 194mm x 910mm**

**17.11 SF per box**

**66 boxes per pallet**

## Details

- Stunning visuals in traditional cork patterns
- Transition-Free up to 50'x50' – float, nail or glue
- Industry leading glueless locking system by Uniclic®
- 4-sided bevel edge
- TORLYS Maxx Finish offers stain and wear resistance with an antimicrobial surface
- Smart engineering guarantees durability, ensuring your floor will never need refinishing
- CorkPlus™ Blue attached underlay with Microban® antimicrobial product protection
- Suitable for use over radiant heat
- FloorScore Equivalent
- Plastic Free - 100% natural product
- FSC® Certified
- Made without cutting down any cork oak trees, ensuring forests remain undamaged
- TORLYS Bulldog™ enables single planks of Cork to be replaced, quickly and easily. No mess, no dust, no downtime

Visit [torlys.com](https://www.torlys.com) for more information

Vintage Cinder | CCU-V90014-FSMX

Vintage Natural | CCU-V90009-FSMX

Vintage Shoreline | CCU-V90067-FSMX

Vintage Western Saddle | CCU-V90022-FSMX



LEED®

TORLYS  
**Bulldog™**  
EASY PLANK REPLACER

# A Cleaner Floor Starts Here.



Contribute to a cleaner home with built-in antimicrobial protection.

TORLYS Maxx Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit [torlys.com/CleanerFloors](https://torlys.com/CleanerFloors)



VINTAGE CINDER

## Finishing Touches

### TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.\*

### TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

\*See installation instructions for details.

## Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is reused in another room or donated to Habitat for Humanity

## Warranty

**Lifetime Residential S.M.A.R.T. Warranty**

**5-Year Commercial Warranty**

A combination of heat and sunlight can cause natural flooring to fade or change colour. Visit [torlys.com/warranty](https://torlys.com/warranty) for details.

# TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.\*

# Easy Maintenance

Cork ensures easy ongoing maintenance.\*


\*Visit [torlys.com](http://torlys.com) for details.

## ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648	Critical Radiant Flux	Average Critical Radiant Flux: 0.28 W/cm2	(NFPA 101 Classification: Class 2)
ASTM E662	Optical Density of Smoke	Pass ≤450	
ASTM E84	Surface Burning	Flame Spread Index: 20 Smoked-Developed Index: 60	(ASTM E84 Class A)
AATCC 30-III (TM 30-III Aspergillus Niger)	Antifungal Assessment and Mildew Resistance Test	Pass = Not supportive of fungal growth	
ANSI A137.1-2012 (aka DCOF AcuTest)***	Coefficient of Friction (Floor Slip Resistance)	Average DCOF (wet): 0.48	
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI Static Load Limit / Residual Indentation @ 1000 PSI	0.008 inch 0.023 inch	
ASTM D2394	Falling Ball Indentation Test @ 72 Inches Drop	0.014 inch = no Fracture of surface or interior material	
ASTM F1914	Short Term Indentation and Residual Indentation	Residual Indentation @ 75 lbs: 0.011 inch	
EN 14354:2017	Determination of the Wear Resistance Using the Falling Sand Method	> 6,000 revolutions	
ASTM C518	Thermal Resistance - Imperial Units Thermal Resistance - SI Units	0.508 °F·ft² h/BTU 0.0894 (m² K)/W	
ASTM F925	Resistance to Chemicals	0 = No Change*	*(11 of 12 chemicals)
ASTM F1515	Resistance to Light	Gray Scale Rating: 1	(Test result after 300 hours exposure)
ASTM E492-09 (2016)e1 / ASTM E989 - 18	Impact Insulation Class	Contact TORLYS for more information	
ASTM E90-09 (2016) / ASTM E413 - 10	Sound Transmission Coefficient	Contact TORLYS for more information	
ASTM E2179	Delta IIC	Contact TORLYS for more information	

\*\*\*Note: Replaces ASTM C1028-07, withdrawn by ASTM in 2014

## How It's Made

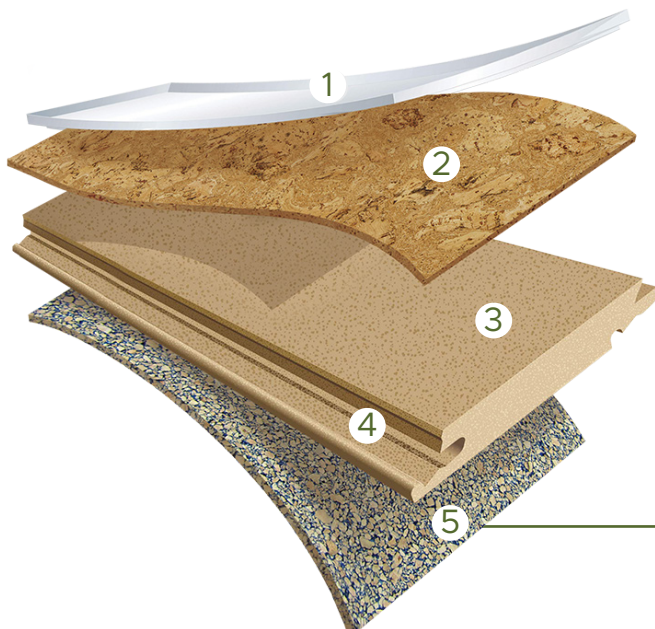

1. TORLYS Maxx Finish (Antimicrobial | Anti-Wear)
2. High density cork layer
3. Low swell TORLYS™ Enhanced Smart Core with dent resistance and dimensional stability
4. Uniclic® joint. The most advanced, gap-resistant joint system available today
5. TORLYS CorkPlus™ Blue underlayment with Microban® antimicrobial product protection

MADE IN PORTUGAL