

PROFESSIONAL

Sango



1/2" (T) x 7-1/2" (W) x 54-11/32" (L) (nominal)
12 mm (T) x 190 mm (W) x 1380 mm (L)

19.76 SF per box

DETAILS

- 12mm waterproof laminate with Hydroseal.
- GenuEdge™ bevel enables the surface design and color to "roll over" the edge for the most realistic looks.
- Easy clean surface that can be wet and steam mopped.
- 4-sided bevel edge and stunning wood visuals and realistic EIR textures.
- AC4 wear rating with a protective wear layer to stand up against everyday scratches, stains and fading.
- CARB 2 compliant.
- Install transition free, up to 50'x50'.
- Replace single planks of Sango quickly and easily with TORLYS Bulldog™. No mess, no dust, no downtime.
- Made in USA.



TORLYS
smart floors


NatureTEK
PERFORMANCE WOOD PLUS




TRIDENT MAPLE



SUGAR MAPLE
QS-UP4878

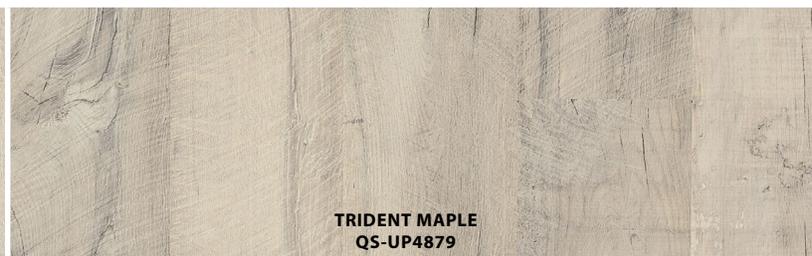

TRIDENT MAPLE
QS-UP4879

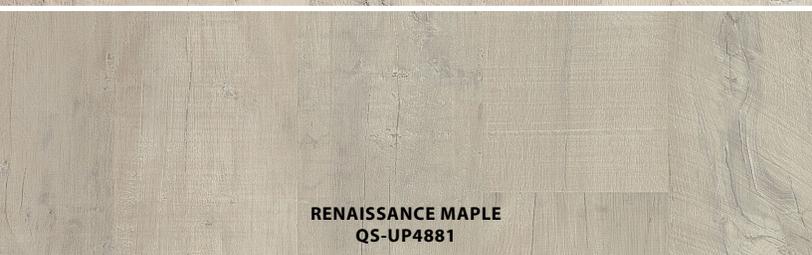

RENAISSANCE MAPLE
QS-UP4881



ASH MAPLE
QS-UP4882

ACCESSORIES



Incizo 5-in-1 Moulding A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding
used to adjoin two floors of identical height.



Reducer
used to transition two different floor heights.



Square Nose to Carpet
used to transition to carpet.



Square Nose Edge Moulding
used to conceal the expansion gap around the room's perimeter.

Flush Stair Nosing*
seamless trim moulding for installation of laminate on staircases. Clicks flush into your laminate floor, thus eliminating the overlap of traditional stair nosing. An aluminum sub-base is required for the Flush Stair Nosing installations. It can also be used for non-flush installations on landings

*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

SOUND RATINGS | IIC: 72

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



WATERPROOF FLOORING


Sango is waterproof* thanks to a combination of the Uniclic® joint and Hydroseal coating.



HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

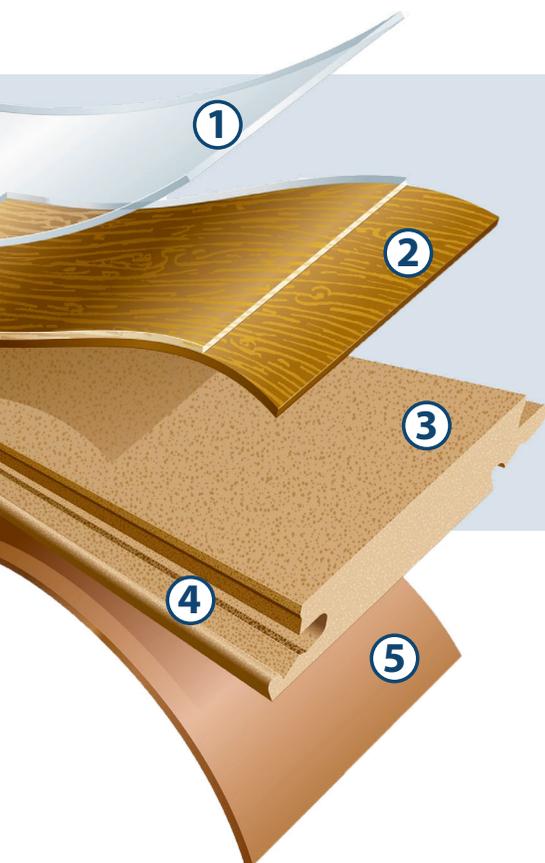

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year, made with GenuEdge™ bevel technology and HydroSeal.
- 2. Decorative Layer** Real wood-like textures featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today.
- 5. Bottom Layer** Backing provides a moisture barrier and added stability.



35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Sango can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Stain, Fade, Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.

