

PROFESSIONAL

Sango



1/2" (T) x 7-1/2" (W) x 54-11/32" (L) (nominal)
12 mm (T) x 190 mm (W) x 1380 mm (L)

19.76 SF per box

DETAILS

- 12mm waterproof laminate with Hydroseal.
- GenuEdge™ bevel enables the surface design and color to "roll over" the edge for the most realistic looks.
- Easy clean surface that can be wet and steam mopped.
- 4-sided bevel edge and stunning wood visuals and realistic EIR textures.
- AC4 wear rating with a protective wear layer to stand up against everyday scratches, stains and fading.
- CARB 2 compliant.
- Install transition free, up to 50'x50'.
- Replace single planks of Sango quickly and easily with TORLYS Bulldog™. No mess, no dust, no downtime.
- Made in USA.

GenuEdge™
TECHNOLOGY




TRANSITIONFREE
INSTALLATION SYSTEM

TORLYS
smart floors

NatureTEK
PERFORMANCE WOOD PLUS




TRIDENT MAPLE

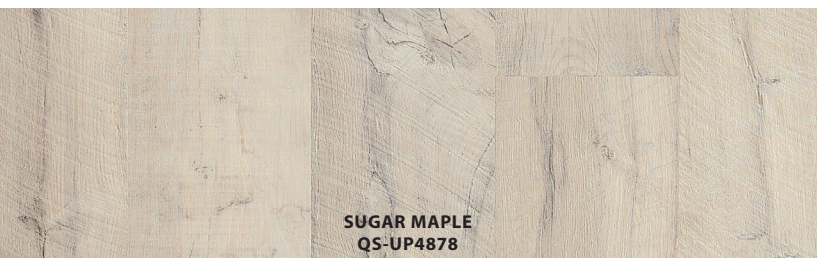


SUGAR MAPLE
QS-UP4878



TRIDENT MAPLE
QS-UP4879

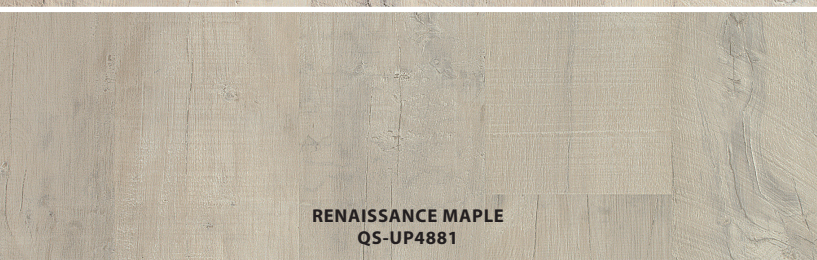

RENAISSANCE MAPLE
QS-UP4881

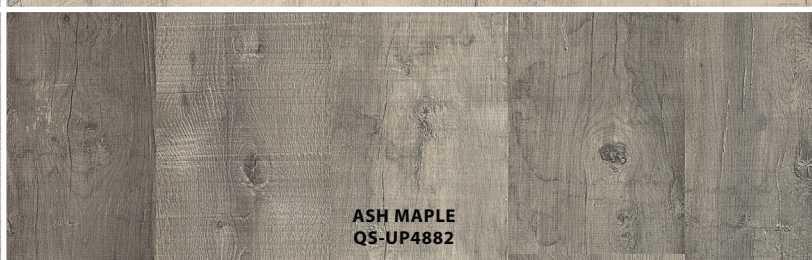

ASH MAPLE
QS-UP4882

ACCESSORIES



Incizo 5-in-1 Moulding A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding
used to adjoin
two floors of
identical height.



Reducer
used to transition two
different floor heights.



**Square Nose
to Carpet**
used to
transition to
carpet.



**Square Nose Edge
Moulding**
used to conceal the
expansion gap around
the room's perimeter.

Flush Stair Nosing*

seamless trim moulding for installation of laminate on staircases. Clicks flush into your laminate floor, thus eliminating the overlap of traditional stair nosing. An aluminum sub-base is required for the Flush Stair Nosing installations. It can also be used for non-flush installations on landings

*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

SOUND RATINGS | IIC: 72

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.

TORLYS
Acoustik™



WATERPROOF FLOORING


Sango is waterproof* thanks to a combination of the Uniclic® joint and Hydroseal coating.



HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

*Fully waterproof when installed with a perimeter seal. Visit torlys.com details.

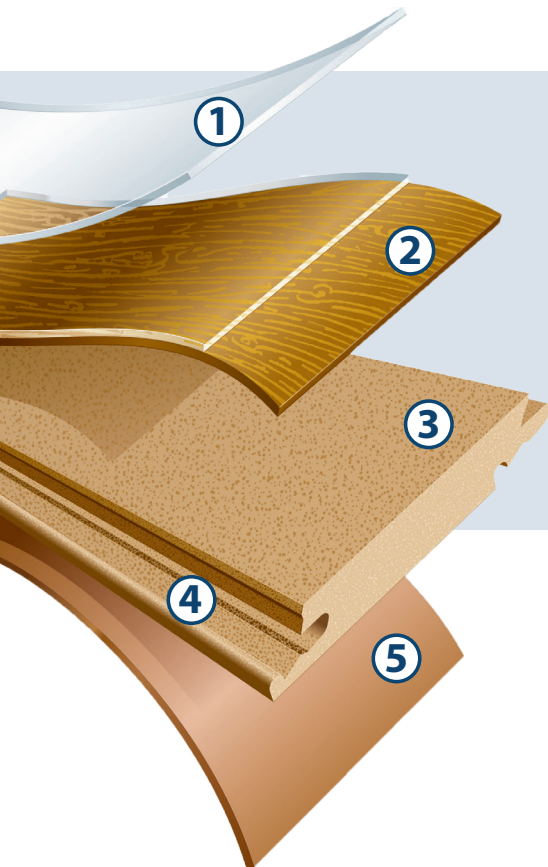

QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year, made with GenuEdge™ bevel technology and HydroSeal.
- 2. Decorative Layer** Real wood-like textures featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today.
- 5. Bottom Layer** Backing provides a moisture barrier and added stability.



35-Year Residential Limited Warranty for Wear, Water Resistance, Stain, Fade, and Transition Free; and a Lifetime Structural and Joint Integrity/No Gapping Warranty. Avenue can be disassembled and re-used in another room or home.

10-Year Surface Waterproof Warranty; no time limit for standing water; damp-mopping allowed.

7-Year Limited Commercial Wear, Stain, Fade, Structural and Joint Integrity/No Gapping Warranty.

*Specific installation instructions apply.

