

EverTile™ Premier

TORLYS
smart floors



CLIFF ISLAND

-  Waterproof
-  Warm&Quiet
-  Gap Resistant
-  Antimicrobial
-  Scratch Resistant
-  Flood Warranty
-  Easily Repairable
-  Dent Resistant
-  Seamless Installation

EverTile™ Premier



5/16" (T) x 11-1/2" (W) x 23-5/8" (L)
8.3mm (T) x 292mm (W) x 601mm (L)

17 SF per box
72 boxes per pallet

Details

- Warm, quiet and comfortable. A beautiful, refreshing change for any room.
- Clean lines, modern styles that are perfect for any space.
- Low-gloss ceramic without the coldness.
- 0.5mm (20 mils) wear layer.
- 4-sided bevels.
- CorkPlus™ Blue attached cork underlay with Microban® antimicrobial product protection.

Check installation instructions/warranty for details.

The Original WPC Vinyl



Waterproof

EverTile™ Premier is 100% waterproof - backed by TORLYS exclusive Flood Warranty.



Transition Free

EverTile™ Premier is a remarkably stable floor that can be installed transition free in spaces up to 80' x 80' no more "speed bumps" in doorways or long hallways.*

**Visit torlys.com for full details.*



TORLYS Bulldog™ Easy Plank Replacer

TORLYS Bulldog™ enables single planks and tiles to be replaced, quickly and easily. No mess, no dust, no downtime.

**High Shade Variation*



CALCATTÀ*

ET-24013



BRIDGEWATER

ET-24008




CLIFF ISLAND

ET-24001



CENERE GREY

ET-24012

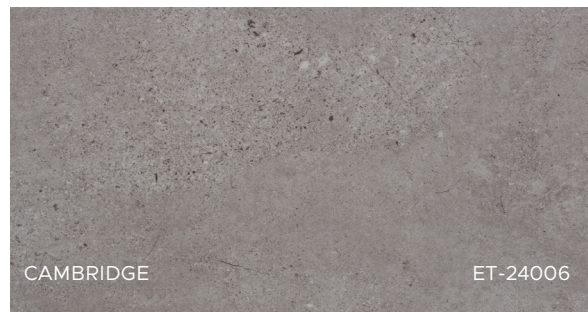

CAMBRIDGE

ET-24006



ANTHRACITE

ET-24011

A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Commercial Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS CorkPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors.



CALCATA



Finishing Touches

TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Sustainability

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, TORLYS will offer a 10% credit towards the purchase of a new floor when your existing TORLYS Smart Floor is donated to Habitat for Humanity.*

*Visit torlys.com for details.

Warranty

Lifetime Residential S.M.A.R.T. Warranty

15-Year Commercial Warranty

EverTile™ Premier is covered by an exclusive **Flood Warranty**.*

*Visit torlys.com for full warranty and installation information.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.*


Healthy Home - Indoor Air Quality

We follow some of the most stringent standards in the world. TORLYS flooring products meet California Section 01350 and/or FloorScore® certification.

**Visit torlys.com for details.*

ASTM and ANSI Product Performance Tests

Standard	Description	Test Result	Notes
ASTM E648-14a	Critical Radiant Flux	Average Critical Radiant Flux: 0.72 W/cm ²	NFPA 101 Classification: Class 1
ANSI A137.1-2012 (aka DCOF AcuTest)	Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction (wet)	Mean Result: 0.43	ANSI A137.1-2012 /
	Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry)	Mean Result: 0.80	DCOF AcuTest replaces ASTM C1028-07*
ASTM F970	Static Load Limit / Residual Indentation @ 250 PSI	0.003 inches	
	Static Load Limit / Residual Indentation @ 1000 PSI	0.055 inches	
ASTM C518	Thermal Resistance	SI Units 0.10 K·m ² /W	Imperial Units 0.59°F·ft ² ·h/BTU·in
ASTM F925-02	Resistance to Chemicals	0 = No Change	
ASTM F1515	Resistance to Light	ΔE ≤ 8	Test result after 300 hours exposure
CPSC-CH-C1001-09.3 (California Proposition 65)	Phthalates	Does not contain phthalate esters	
ASTM E492-09 / ASTM E989-06	Impact Insulation Class	Contact TORLYS for details	
ASTM E90-04 / ASTM E413-10	Sound Transmission Coefficient	Contact TORLYS for details	

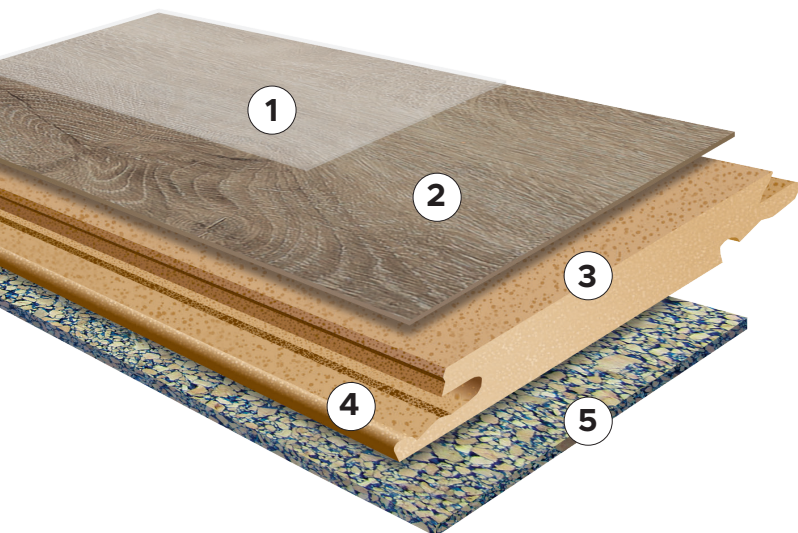

How It's Made

1) Top Layer

Ultra-thick 0.5mm (20 mils) wear layer for ultimate wear resistance

2) Decorative Layer

Beautiful, authentic look and fade resistant

3) TORLYS Enhanced Smart Core

More than twice as thick as the industry standard

4) TORLYS Uniclic® Joint

Gap-free installations and easy repairs with TORLYS Bulldog™ Easy Plank Replacer

5) TORLYS CorkPlus™ BLUE Underlay

Quiet, comfortable, built-in underlay with Microban® antimicrobial product protection