

RigidWood™

Firm Vista

TORLYS
smart floors



HELM OAK

-  Waterproof
-  Seamless Installation
-  Antimicrobial
-  Scratch Resistant
-  Flood Warranty
-  Easily Repairable
-  Dent Resistant
-  Gap Resistant

RigidWood™

Firm Vista

5/32" (T) x 6" (W) x 47-3/4" (L) (nominal)
4.5mm (T) x 150mm (W) x 1211.2mm (L)

23.47 SF per box
54 boxes per pallet

Details

- Beautiful, lightly textured surfaces with matching painted bevels.
- 0.3mm / 12 mil wear layer.
- Install directly over other hard surfaces with minimal subfloor preparation.
- Patented Uniclic® joint with pretension keeping any water on the surface of the floor.
- TORLYS Maxx Finish resists household wear and staining, and features built-in antimicrobial protection.
- TORLYS FoamPlus™ Blue attached underlay for superior sound reduction and shock-absorption with anti-crush technology. Infused with Microban® antimicrobial technology.
- Remarkable dimensional stability that can withstand temperature swings from -4 - 122°F (-20 - 50°C).
- More dent resistant than traditional LVT.
- Suitable to install over radiant heat.*
- Conforms to subfloor for a quieter, more solid feel.
- Can be fixed/floated on the same floor.*
- No peaking, gapping or cupping, guaranteed.*

**check installation instructions/warranty for details.*

The Smart Advantage SPC



Waterproof

RigidWood™ is 100% waterproof - backed by TORLYS exclusive Flood Warranty.



Seamless Installation

RigidWood™ is a remarkably stable floor that can be installed transition free in spaces up to 70' x 70'; no more "speed bumps" in doorways or long hallways.



TORLYS Bulldog™ Easy Plank Replacer

TORLYS Bulldog™ enables single planks to be replaced, quickly and easily. No mess, no dust, no downtime.

SPINNAKER

RW-FMV151

BRIDGEWAY

RW-FMV156

BLUEPETER

RW-FMV153

HELM OAK

RW-FMV154

DECK OAK

RW-FMV152

MOORING

RW-FMV157

LIDO OAK*

RW-FMV155

FOREMAST

RW-FMV150

**High shade variation*



A Cleaner Floor Starts Here.

Contribute to a cleaner home with built-in antimicrobial protection.



TORLYS Maxx Finish with built-in antimicrobial technology will keep your floors **99% cleaner** between cleanings, **24/7**.

TORLYS FoamPlus™ Blue with Microban® offers safe and effective protection against the growth of mold and mildew under your floors.

For more information visit torlys.com/CleanerFloors



MOORING

Finishing Touches

TORLYS Smart-T Plus Molding

Easy and convenient, the TORLYS Smart-T Plus molding solution offers an adaptable and digitally matched profile. Suitable for floating applications.*

TORLYS SmartNosing Molding

A unique stair nosing solution to add the perfect finishing touch. This square edge nosing features the same Uniclic® joint as your floor for an easy and seamless installation.

*See installation instructions for details.

Warranty

Lifetime Residential Limited Warranty*

5-Year Commercial Limited Warranty*

RigidWood™ is covered by an exclusive **Flood Warranty**.

*Visit torlys.com for full warranty and installation information.

TORLYS Beautiful Promise

Love the style and colour of your floors or change them – no questions asked. That’s our beautiful promise.*


Healthy Home - Indoor Air Quality

We follow some of the most stringent standards in the world. TORLYS flooring products meet California Section 01350 and/or FloorScore® certification.

*Visit torlys.com for details.

ASTM and ANSI Product Performance Tests

| Standard | Description | Test Result | Notes |
|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| ASTM E648-17 | Critical Radiant Flux | Average Critical Radiant Flux: $\geq 0.45 \text{ W/cm}^2$ | NFPA Life Safety Code 101 Classification: Class 1 |
| ASTM E662-17a | Smoke Density | ≤ 450 | Passes ≤ 450 Criteria, as per NFPA Life Safety Code 101 |
| Phthalates, as per CPSC-CH-C1001-09.3 (California Proposition 65) | Phthalates | Does not contain phthalate esters | |
| RoSH | Heavy Metals | Pass | |
| ASTM D5116-10 (Small Chamber) | Formaldehyde Emissions | No Formaldehyde | |
| ANSI A137.1-2012 (aka DCOF AcuTest) | Coefficient of Friction (Floor Slip Resistance): a) Dynamic Coefficient of Friction (wet) | Mean Result: 0.44 | Passes the ≥ 0.42 requirement |
| | Coefficient of Friction (Floor Slip Resistance): b) Static Coefficient of Friction (dry) | Mean Result: 0.49 | |
| ASTM F925 | Resistance to Chemicals | Slight Surface Change / Dulling by White Mineral Oil and NaOH Solution | The scale is 0-3; 0 = no change; 1 = slight change; 2 = moderate change 3 = severe change |
| ASTM F1515 | Resistance to Light | $\Delta E \leq 8$ | Test result after 400 hours exposure |
| ASTM E492-09 (2016) - ASTM E989-06 (2012) | Impact Insulation Class | Contact TORLYS for details | |
| ASTM E90-09 (2016) / ASTM E413 - 16 | Sound Transmission Coefficient | Contact TORLYS for details | |

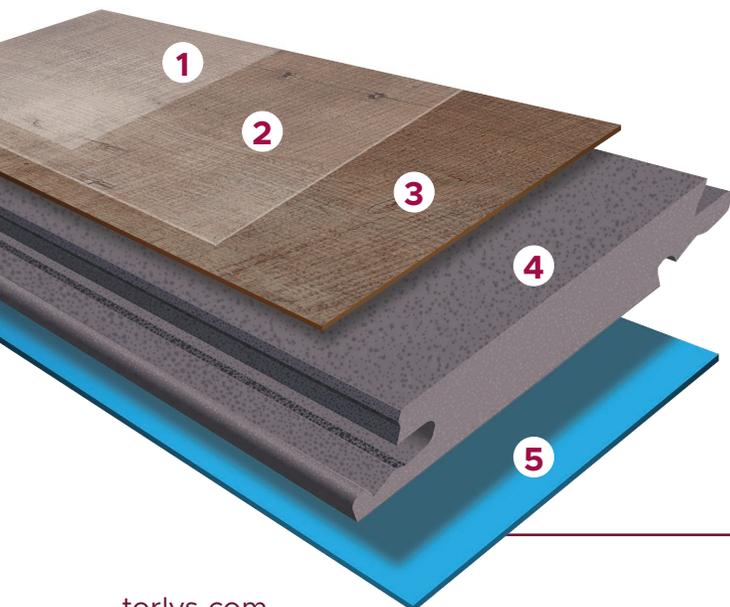

Stable & Flexible Construction

1. TORLYS Maxx Finish (Antimicrobial | Anti-Wear)
2. Heavy Duty Wear Layer 0.3mm (12 mil) wear layer
3. Decorative Print Film
4. Rigid Core with Patented Uniclic® Joint
5. FoamPlus™ Blue Underlay with Microban®