



A Modern Classic

SUPERSOLID™
HARDWOOD by TORLYS

Stunning

Stability and long lasting performance, finished beautifully with best-in-class KLUMPP top coat.

Sustainable

Precision-engineered with a resandable wear layer to reduce environmental impact, extend the lifetime of the floor, and produce up to 4 times more flooring than solid hardwood.

Superior

E-Lock and Deca technology are cup, gap and crack resistant, extra-durable and stable to perform in any climate or application.

Warranty



25-Year Wear Warranty and a Lifetime Structural Warranty for residential use.



A 5-Year Wear Warranty and Lifetime Structural Warranty applies to light commercial applications.

A Radiant Heat Warranty applies to all SuperSolid Hardwood.





Best in Class Benefits

Gap Resistant

Advanced joint technology helps prevent ugly gaps from appearing in the winter months.

Cup Resistant

Superior cup resistance, no more unsightly planks.

Crack Resistant

Using the industry's best practice, the dry sawn wear layer resists the cracking or splitting common to solid hardwood.

Use on Any Level

Guaranteed to perform on any level in your home, including basements.

Radiant Heat Safe

Unlike other solid floors, SuperSolid floors are guaranteed over radiant heat.

Float, Nail, Glue

Precise milling and construction makes SuperSolid versatile for any installation.

Resandable Wear Layer

Resand your floors for a lifetime of performance.

Best In Class Coating:

Features KLUMPP, the latest water-resistant nano-particle finish technology.




Note: SuperSolid Hardwood is a natural product. Colour variation and natural knotting adds to the pleasing visual. It is recommended to look at a physical sample of the product for the best representation.

Visit torlys.com
for more details

BEACH GROVE OAK*
EE16003
(WIREBRUSHED)

SuperSolid 7 & 6 – E-Lock Technology

Built-in E-Lock technology provides superior construction in wide plank hardwood, ensuring stability and performance.

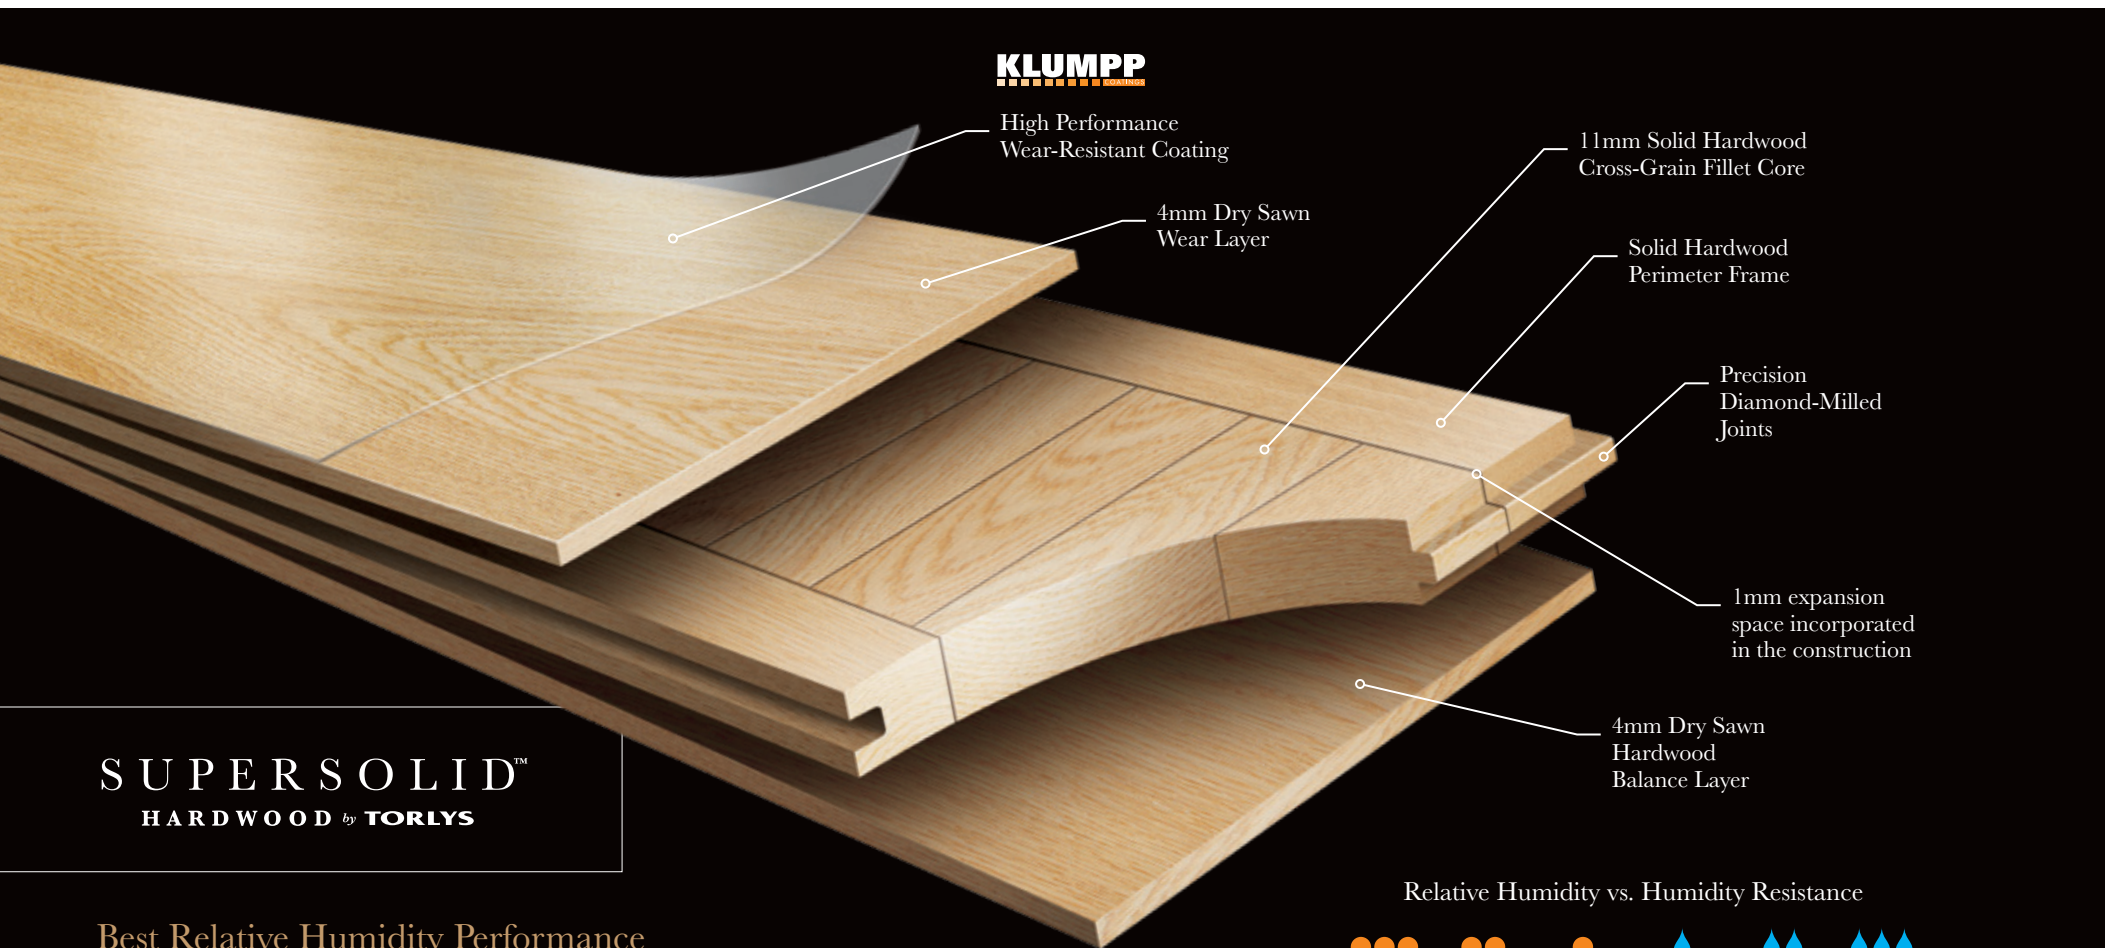


SUPERSOLID™
HARDWOOD by TORLYS

Best Relative Humidity Performance Guarantee in the Industry!

Traditional solid hardwood can expand and contract when humidity levels change, causing unsightly cupping and gapping. The superior engineering and advanced construction of SuperSolid Hardwood out-performs solid wood across a much larger range of relative humidity.

Relative Humidity vs. Humidity Resistance

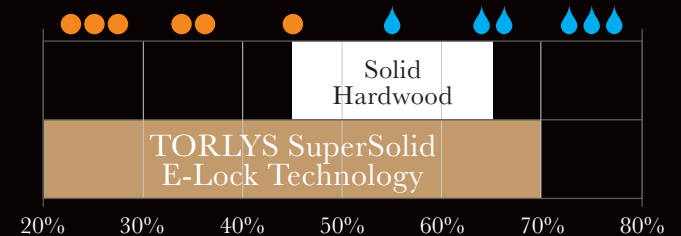

SuperSolid 5, 4 & 3 – Deca Technology

Utilizes the latest advancements in flooring to deliver the optimal blend of performance and value for narrow plank hardwood.

KLUMPP
CONSTRUCTION

High Performance
 Wear-Resistant Coating



3mm Dry Sawn
 Resandable
 Wear Layer

9 Layers Cross Grain
 Construction of
 Plantation Hardwood
 for Added Durability
 and Stability

Precision
 Diamond-Milled
 Joints for Quick and
 Easy Installation

SUPERSOLID™
 HARDWOOD by **TORLYS**

Relative Humidity vs. Humidity Resistance

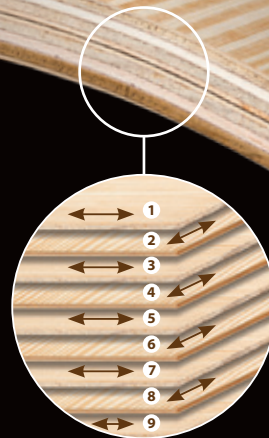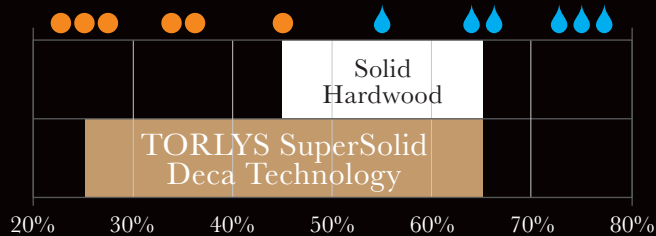

SuperSolid™ 7 (with E-Lock Technology)

Welcome to the very best in hardwood, beautifully textured with wire-brushed or handscraped finishes.

3/4" x 7-1/2" x Random length (24" to 75", Average length 65")

19mm x 190mm x Random length (600mm to 1900mm, Average length 1663mm)



*High Shade Variation



BEACH GROVE OAK*
EE16003-19
(WIREBRUSHED)

7-1/2" Width


← ACTUAL WIDTH OF PLANK →

SuperSolid™ 6 (with E-Lock Technology)

Beautifully styled hardwood in 6 inch widths create a floor that will stand the test of time in both looks and performance.

3/4" x 5-7/8" x Random length (24" to 75", Average length 56")

19mm x 150mm x Random length (600mm to 1900mm, Average length 1425mm)

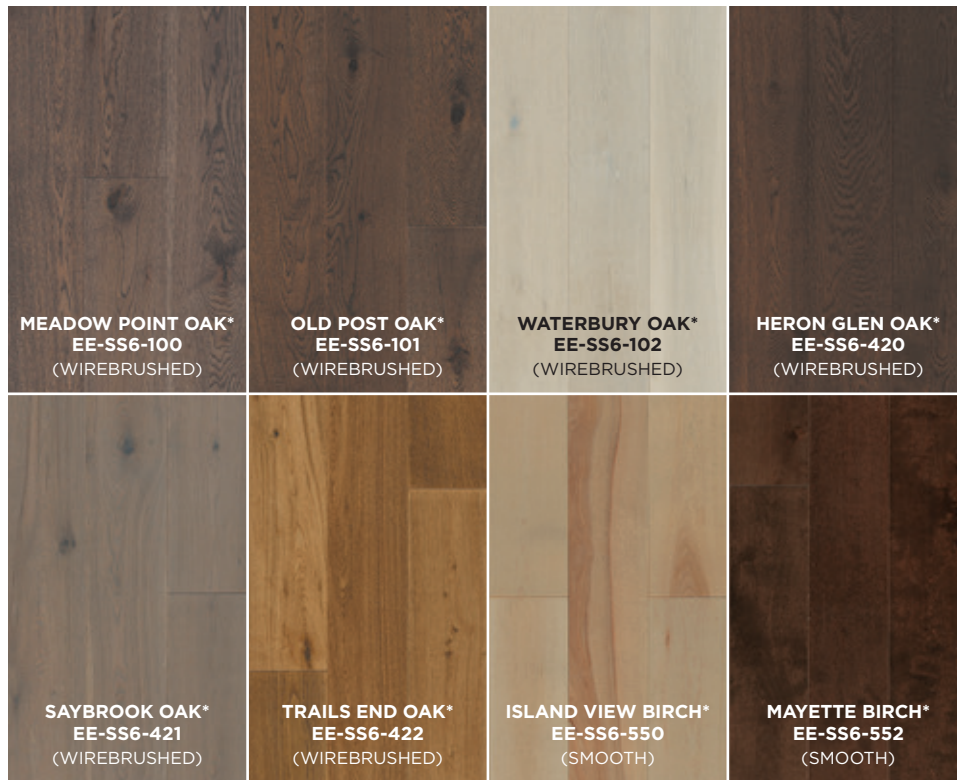

*High Shade Variation



5-7/8" Width

ACTUAL WIDTH OF PLANK



SuperSolid™ 5 (with Deca Technology)

A beautiful collection of stylish, environment-friendly floors in designer-selected colours, lightly-distressed wirebrushed and handscraped oak.

3/4" x 5" x Random length (15-3/4" to 86-1/2", Average length 44")

19mm x 127mm x Random length (400mm to 2200mm, Average length 1100mm)



FORESTVALE OAK
EE13526

5" Width

← ACTUAL WIDTH OF PLANK →

SuperSolid™ 4 (with Deca Technology)

Stunning narrow plank hardwood that creates a cleaner, more contemporary feel. Excellent for making small spaces seem larger.

3/4" x 4-1/4" x Random Length (15-3/4"- 86-1/2", Average length 40")
 19mm x 108mm x Random Length (400mm to 2200mm, Average length 1000mm)



TAVERN
EE13450

SuperSolid™ 3 (with Deca Technology)

A gorgeous narrow plank hardwood to create a more polished, modern feel in any space. Available in a range of stains.

3/4" x 3-1/4" x Random Length (15-3/4"- 86-1/2", Average length 40")
 19mm x 83mm x Random Length (400mm to 2200mm, Average length 1000mm)



CAMEO
EE13303



*High Shade Variation



*High Shade Variation

4-1/4" Width



3-1/4" Width



Cutting Edge Superiority

Consistent, uniform construction creates more stable floors.

SUPER SOLID™
HARDWOOD by TORLYS



Dry Sawn Top Layer

Recognized as the industry “Best Practise”, solid hardwood is slowly dried to the desired 6-8% moisture content before it’s sawed. The result preserves the natural beauty of the grain, looks identical to 3/4” solid hardwood flooring, and resists cracking, splitting and checking.

The Competition

Rotary Peeled

The log is boiled and then peeled in an ultra-thin layer using a rotary cutter (the same method used to make plywood). This results in repetitive patterns, a thin wear layer, and can lead to splitting and cracking.

Sliced

Slicing uses a razor to cut logs flat. To slice correctly, the wood is boiled or steamed which can weaken the structure of the wood and the floor.



CAMEO
EE13303

Beautifully Finishing Your Floors

Complete your installation with colour coordinating stair nosings and mouldings.
Visit torlys.com for details.

Easy Maintenance

SuperSolid Hardwood makes cleaning easy and carefree. TORLYS EcoCare Cleaning Kit is easy on the environment, leaves no trace of residue, and is non-toxic making it safe for pets and children.



For specific maintenance instructions, visit torlys.com



FORESTVALE OAK
EE13526



WILDWOOD OAK*
EE16150-19
(HANDSCRAPED)



WILDWOOD OAK*
EE16150
(HANDSCRAPED)



FORESTVALE OAK
EE13526

MK-EE-HC932

SUPERSOLID™
HARDWOOD by TORLYS

torlys.com