

PROFESSIONAL

# Sango



1/2" (T) x 7-1/2" (W) x 54-11/32" (L) (nominal)  
12 mm (T) x 190 mm (W) x 1380 mm (L)

19.76 SF per box

## DETAILS

- 12mm waterproof laminate with Hydroseal.
- GenuEdge™ bevel enables the surface design and color to "roll over" the edge for the most realistic looks.
- Easy clean surface that can be wet and steam mopped.
- 4-sided bevel edge and stunning wood visuals and realistic EIR textures.
- AC4 wear rating with a protective wear layer to stand up against everyday scratches, stains and fading.
- CARB 2 compliant.
- Install transition free, up to 50'x50'.
- Replace single planks of Sango quickly and easily with TORLYS Bulldog™. No mess, no dust, no downtime.
- Made in USA.

GenuEdge™  
TECHNOLOGY




TRANSITIONFREE  
INSTALLATION SYSTEM

**TORLYS**  
smart floors

NatureTEK<sup>SELECT</sup>




TRIDENT MAPLE

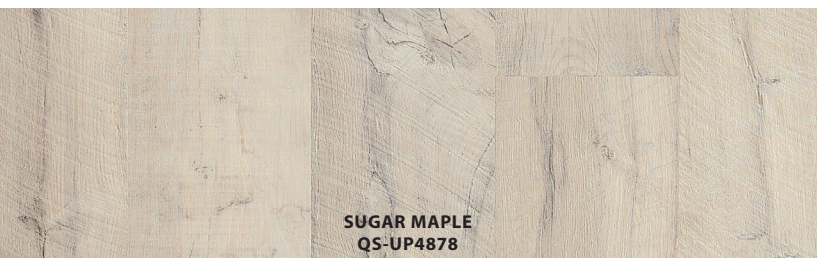


SUGAR MAPLE  
QS-UP4878



TRIDENT MAPLE  
QS-UP4879

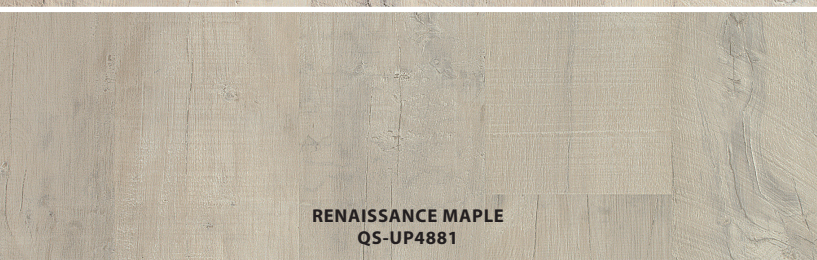

RENAISSANCE MAPLE  
QS-UP4881

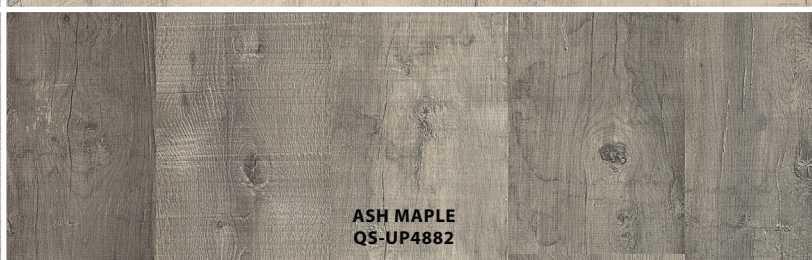

ASH MAPLE  
QS-UP4882



## ACCESSORIES



### TORLYS Exclusive | smartSTEP Moulding

TORLYS laminates offer a unique smartSTEP moulding solution to add the perfect finishing touch to your installation. The smartSTEP is made from a full plank of flooring for a perfect colour, texture & dimension match. It also uses the same Uniclic® joint as the matching floor for an easy installation. A specially engineered metal plate can be used in conjunction with the smartSTEP to allow for a floating installation on landings.



### Incizo 5-in-1 Moulding

A Reducer, T-Moulding, Square Nose and Flush Stair Nosing in ONE profile.



T-Moulding



Square Nose to Carpet



Reducer



Square Nose Edge Moulding



Flush Stair Nosing\*

\*An aluminum sub-base is required for the Flush Stair Nosing installations. Incizo can also be used for non-flush.

### SOUND RATINGS | IIC: 72

Pair your TORLYS smart laminate with a TORLYS underlayment for superior installation results. Please contact TORLYS for a copy of test reports.



### WATERPROOF FLOORING


Sango is waterproof\* thanks to a combination of the Uniclic® joint and Hydroseal coating.



### HYDROSEAL

HydroSeal water-repellent edge coating keeps water from penetrating the floor's core.

\*Fully waterproof when installed with a perimeter seal. Visit [torlys.com](http://torlys.com) details.

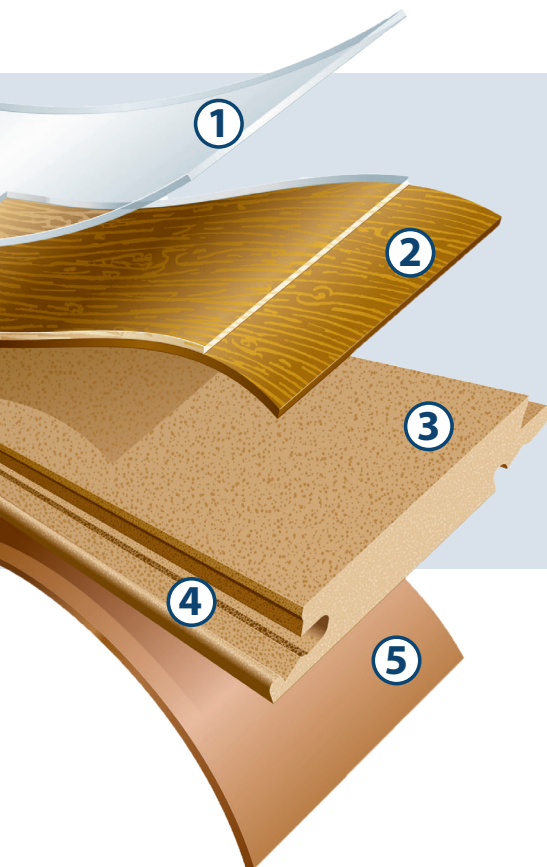

## QUALITY BUILT IN

- 1. Top Layer** A top finishing layer to ensure your floor stays beautiful year after year, made with GenuEdge™ bevel technology and HydroSeal.
- 2. Decorative Layer** Real wood-like textures featuring natural designs.
- 3. TORLYS Smart Core** Dent resistant and strong.
- 4. TORLYS Uniclic® Joint** The most advanced, gap-resistant joint system available today.
- 5. Bottom Layer** Backing provides a moisture barrier and added stability.



**Residential Warranty:** 35 Year limited wear, stain, water and fade. Lifetime structural and joint integrity/no gapping warranty. Sango can be disassembled and re-used in another room or home.

**Light Commercial Warranty:** 7 Year limited wear, stain and fade. Lifetime structural and joint integrity/no gapping warranty.

